

Using WordNet Lexical Database and Internet to Disambiguate Word Senses

Kostas Fragos¹, Yannis Maistros¹, Christos Skourlas²

¹ Department of Computer Engineering, National Technical University of Athens
15780 Zografou Athens, Greece

Email: {kfragos, maestros}@ece.ntua.gr

² Department of Computer Science, TEI of Athens
12210 Aigaleo Athens, Greece

Email: cskourlas@teiath.gr

Abstract. The term “knowledge acquisition bottleneck” has been used in Word Sense Disambiguation Tasks (WSDTs) to illustrate/express the problem of the lack of large tagged corpora. In this paper, an automated WSDT is based on text corpora extracted / collected from Internet web pages. First, the disambiguation for the sense of a word, in a context, is based on the use of its definition and the definitions of its direct hyponyms in the WordNet to form queries for searching the Internet. Then, the “sense-related examples”, in other words the collected answers / information, are used to disambiguate the word’s sense in the context. A (similarity) metric is used to calculate the similarity between the context and the “sense-related examples” and the word is assigned the sense of the most similar example with the context. Some experiments are briefly described and the evaluation of the proposed method is discussed.

1 Introduction

The word sense ambiguity is a hard problem for the developers of Natural Language Processing (NLP) systems. Words, often, have different meaning in various contexts. As an example, *bus* could mean a “vehicle” or an “electrical conductor connecting circuits”. NLP related applications as text retrieval, automatic translation, summarization etc. are examples of the importance of word sense disambiguation.

Much work has been done to develop computer systems that receive plain text as input and tag each word following a disambiguation task. Two main approaches could be mentioned:

Knowledge based techniques, using Machine Readable Dictionaries (MRDs) and Thesaurus [1, 18, 20, 21, 22]. Corpus-based techniques usually using (disambiguated) text to train a statistical disambiguation module [3, 7, 8, 11, 22].

Statistical approaches are considered good techniques but suffer from the problem of “data sparseness”. In general, the larger the corpora the better the disambiguation accuracy. But the problem is that some words are infrequent even in the largest corpora. In other words, in order to disambiguate a polysemous word, this word must have a critical number of occurrences in a corpus. To overcome this problem, other

techniques have been developed combining Knowledge-based and Corpus-based approaches.

In order to fill in the gaps in “sparse” training data, Resnik [19] uses an information-based measure, “the most informative class”, based on the WordNet taxonomy. Leacock and Chodorow [10] in their experiment exploit similarity measures based on the distances between words in the WordNet taxonomy. They report a modest improvement in performance, especially when the training occurs on small data sets. Similarity-based techniques [5, 9] calculate similarity measures between words based on co-occurrence in similar contexts. However, these approaches require also a substantial amount of training set. Luk [12] uses definitions from the Longman Dictionary of Contemporary English - LDOCE (Procter, 1978) and tries to find co-occurrence of concepts in a relatively small corpus, the Brown corpus, that consists of one million words. LDOCE is used because all its definitions have been written using a set of 2000 words. Luk reports that the proposed system achieves an average accuracy comparable to human performance given the same contextual information. The serious problem for this approach is that many words of the control vocabulary are polysemous. Thus, a defining concept actually stands for a number of different concepts.

Karov and Edelman [9] proposed a similarity measure between words and sentences, with other sense-related examples (“feedback set”), to automate WSDT. Their system learns to disambiguate using as examples the appearances of a polysemous word in an untagged corpus. The “feedback set” for a sense is the union of all contexts that contain some noun found in the sense’s definition (in a MRD). No mention is made of the way of collecting such data.

Mihalcea and Moldovan proposed a method [17] for the automatic acquisition of sense tagged corpora. First, the WordNet is searched and the various senses of a word are determined. Then, the WordNet definition, for each possible sense, is used to form an Internet query that finds text examples containing only the exact defining phrase.

Finally in the collection of examples gathered from Internet the defining phrase is replaced with the original word form. Hence, example sentences for each sense are created. They report that the results were manually checked for correction and an accuracy of 92% was achieved based on human judgment.

Open Mind Word Expert in [4] is an implemented active learning system that proposes a method for creating large sense tagged corpora that may be collected from the existing millions of web users. Mihalcea in [16] also uses Internet, WordNet and Sencor corpus for the automatic generation of large sense tagged corpora.

In this paper, an adoption / modification of the similarity measure of Karov and Edelman is used. This similarity-based technique exhibits a good behavior, provided that a sufficient amount of tagged corpora is used during the training phase. The definitions for senses found in WordNet are used and the acquisition of sense-related examples (“the feedback set”) is automated using information gathered from Internet with search engines. The WordNet’s entries are organized into synonyms (sets) and various relations link the synonyms (sets). Hence, the hyponymy relation between nouns in WordNet taxonomy is used to enrich our data collection from search engines results.

In our method the Internet searches are used in a different way. For each sense, we do not search for exact phrases but we gather sentences containing only combinations

of words in synsets and nouns found firstly in WordNet sense definition and secondly in WordNet definitions of all its direct hyponyms. These sentences (“the sense-related examples”) disambiguate the word’s examples using a similarity-based technique. In section 2 a brief introduction to WordNet lexicon is given and the sense entries and the semantic hierarchies are explained. In section 3 the semantic similarity measure, used in our method, is described. In section 4 the method is presented. Finally, in sections 5 and 6 experimental results are given and discussed.

2 An Introduction to the WordNet

WordNet [6, 14, 15] is an electronic lexical database developed at Princeton University. WordNet entries (“senses”) are organized into synonyms sets (“synsets”) representing concepts. Each synset in WordNet is followed by its definition (“gloss”) which contains a defining phrase, an optional comment and examples. WordNet supports two types of relations: semantic relations, which link concepts (i.e. synsets), such as hypernymy, hyponymy, meronymy, holonymy, troponymy etc. and lexical relations, such as antonymy, which links individual words. In this paper the hypernymy-hyponymy relation between noun senses is used. This relation generates a hierarchical semantic organization for nouns and verbs. It is expressed with bi-directional pointers between synsets. Table 1 depicts the synsets, the gloss, the hyponyms and the hypernyms of the sense *administration#2*.

| | |
|---|---|
| <i>administration#2</i> (#2 means the second sense of the word in Wordnet) | |
| “ <i>governing body who administers something</i> ” | |
| Synset: (<i>administration, governance, establishment, brass, organization, organisation</i>) | |
| Gloss 2. administration, governance, establishment, brass, organization, organisation -- (the persons (or committees or departments etc.) who make up a governing body and who administer something; "he claims that the present administration is corrupt"; "the governance of an association is responsible to its members"; "he quickly became recognized as a member of the establishment"). | |
| Hyponyms | Hypernyms |
| => executive - (persons who administer the law) ⇨ judiciary, bench - (persons who administer justice) ⇨ judiciary, bench - (persons who administer justice) ⇨ management - (those in charge of running a business) | ⇨ body - (a group of persons associated by some common tie or occupation and regarded as an entity; "the whole body filed out of the auditorium") => gathering, assemblage - (a group of persons together in one place) => social group - (people sharing some social relation) ⇨ group, grouping - (any number of entities (members) considered as a unit). |

Table 1. The synsets, the gloss, the hyponyms and the hypernyms of the sense *administration#2*

A measure of similarity among senses could be the conceptual distance among senses in WordNet hierarchies [13]. This distance is defined as the length of the shortest path between two senses in this hierarchical semantic net. However, Leacock and Chodorow [10] pointed out that WordNet similarity measure is inadequate as a stand-alone classifier for word sense disambiguation.

3 A Method for Calculating (Semantic) Similarity

In this paper, the similarity-based technique used by Karov and Edelman [9] is modified and used. More precisely, the similarity between the word w in a context and the sense-related examples, for each sense of w , is calculated. Karov and Edelman reported that the use of weights (based on the total frequency of a word in the corpus or textual distance from the target word etc) contributed about 5% to the disambiguation performance. Hence, our calculation did not use weights to emphasize the importance of contribution between words etc. However, the definitions of all the direct hyponyms of a “target” word were additionally used. Hence, our sense-related examples consist of co-occurrences of nouns that are found both in the definition of the sense and the definitions of all its direct hyponyms.

Our technique, also, incorporates/uses two similarity measures: word similarity measure and context similarity measure. Words are considered similar if they co-occur in similar contexts and contexts are similar if they contain similar words. These definitions allow us to identify similarities for words and sentences using an iterative process.

Let see an example (adopted from Karov and Edelman). Consider the following sentences:

S1: *eat banana*

S2: *taste banana*

S3: *eat apple*

In the first iteration, the word *banana* is considered to be similar with the word *apple* because they appear in the same contexts (notice verb *eat*). The words *eat* and *taste* are similar because they appear in similar contexts (notice the word *banana*).

In the second iteration, sentences S2 and S3 are considered to be similar because they share similar words (*taste, eat*) and (*banana, apple*) identified in the previous iteration. As a consequence of the similarity between sentences S2, S3, we can conclude the similarity between the words: *taste* and *apple* (they appear in similar sentences).

The example is focused on two important aspects of this technique: the iteration in detecting similarities and the transitivity of such a consideration of similarity, which allows us to catch high-order similarities.

To formalize the intuitive definitions of similarity, we assume that each sentence is represented as a set of features: Nouns, verbs (not including auxiliaries), and adjectives.

3.1 Notation

The similarity between sentences s_1 and s_2 in n iteration, is denoted as $\text{sim}_n(s_1, s_2)$ and the similarity between words w_1 and w_2 in n iteration, as $\text{sim}_n(w_1, w_2)$. The fact that a word w belongs to a sentence s is denoted as $w \in s$ and if a sentence s contains a word w it is denoted as $s \ni w$.

The similarity between sentences s_1 and s_2 is defined in the following way:

$$\text{sim}_{n+1}(s_1, s_2) = (\sum_w \max_{w_i} \text{sim}_n(w, w_i)) / m, w \in s_1 \wedge w_i \in s_2. \quad (1)$$

where m is the number of the words contained in sentence s_1 .

In other words, the similarity between sentences s_1 and s_2 , in iteration $n+1$, for all $w \in s_1$, is the average of all the $\max \text{sim}_n(w, w_i)$, in iteration n , for all $w_i \in s_2$.

In a similar way, we could define the similarity between words:

$$\text{sim}_{n+1}(w_1, w_2) = (\sum_s \max_{s_j} \text{sim}_n(s, s_j)) / k, w_1 \in s \wedge w_2 \in s_j. \quad (2)$$

where k is the number of sentences s which contain word w_1 .

Note that word similarity and sentence similarity are asymmetric [9].

3.2 Word Similarity and Sentence Similarity

Suppose that we have a context c containing a polysemous word w that could appear with senses s_1, s_2, \dots, s_k . We also have the feedback set (sense-related examples) for each sense of w . Our aim is to disambiguate w .

Two matrices are calculated:

The word similarity matrix $WSM_{p \times p}$ where the p rows and p columns keep the words encountered in context c and sense related examples. Each cell (i, j) of the matrix WSM contains a value between 0 and 1, indicating the degree of similarity between words w_i, w_j .

The sentence similarity matrix $SSM_{1 \times (r+1)}$ where in the single row is kept the context of w and in the columns all the sense-related examples plus the context of w .

The similarities are calculated by using the Equations (1) and (2) in an iterative process as follows:

First:

```

Initialize word similarity matrix  $WSM$ , to the identity
matrix, so that each word to be fully similar to itself
and fully dissimilar to other words;
repeat
  Update the sentence similarity matrix  $SSM$ , using the word
  similarity matrix  $WSM$ ;
  Update the word similarity matrix  $WSM$ , using the sentence
  similarity matrix  $SSM$ ;
until  $StopCondition$ ;

```

In the $StopCondition$ the "True" value is assigned when the changes in the similarity values are small enough. Karov and Edelman give a proof that word and sentence similarity values converge and a detailed description of the stop condition forming a basis for our method.

Let us clarify how the algorithm works in the above example of the three sentences (s_1, s_2, s_3) using a 3x3 *SSM*. In the sentences we have the following words: $w_1 = eat$, $w_2 = banana$, $w_3 = taste$, $w_4 = apple$. Hence, after the initialization phase the word similarity matrix *WSM* will be:

| <i>WSM</i> | w_1 | w_2 | w_3 | w_4 |
|------------|-------|-------|-------|-------|
| w_1 | 1 | 0 | 0 | 0 |
| w_2 | 0 | 1 | 0 | 0 |
| w_3 | 0 | 0 | 1 | 0 |
| w_4 | 0 | 0 | 0 | 1 |

Table 2. *WSM* initially

| <i>WSM</i> | w_1 | w_2 | w_3 | w_4 | <i>SSM</i> | s_1 | s_2 | s_3 |
|------------|-------|-------|-------|-------|------------|-------|-------|-------|
| w_1 | 1 | 0.75 | 0.25 | 0.75 | s_1 | 1 | 0.5 | 0.5 |
| w_2 | 0.75 | 1 | 0.75 | 0.25 | s_2 | 0.5 | 1 | 0 |
| w_3 | 0.5 | 1 | 1 | 0 | s_3 | 0.5 | 0 | 1 |
| w_4 | 1 | 0.5 | 0 | 1 | | | | |

Table 3. *WSM* and *SSM* after first iteration

| <i>WSM</i> | w_1 | w_2 | w_3 | w_4 | <i>SSM</i> | s_1 | s_2 | s_3 |
|------------|-------|-------|-------|-------|------------|-------|-------|-------|
| w_1 | 1 | 1 | 0.75 | 0.94 | s_1 | 1 | 0.88 | 0.88 |
| w_2 | 1 | 1 | 0.94 | 0.75 | s_2 | 1 | 1 | 0.63 |
| w_3 | 1 | 1 | 1 | 0.63 | s_3 | 1 | 0.63 | 1 |
| w_4 | 1 | 1 | 0.63 | 1 | | | | |

Table 4. *WSM* and *SSM* after second iteration

This simple example demonstrates how the similarity values evolve with the number of iteration and also demonstrates the transitivity of similarity measures, although we used only two iterations. This allows us to capture high-order conceptual relationships. For example, the sentence s_2 after the second iteration is similar to s_3 with a similarity value 0.63.

4 Disambiguation Procedure

Suppose that we want to disambiguate a word that appeared in a context (the local textual information around the word, that is, a sentence containing the word or the two adjacent sentences in the case of a small sentence).

In the present work, Internet is used as a resource to gather the essential information for each word in order to disambiguate its appearances. Hence, for each word and for all its senses, we collect sentences that contain nouns found in WordNet definitions (of the sense and its direct hyponyms). These sentences are called the “feedback set” or the “sense-related examples” for our algorithm.

The disambiguation procedure comprises the following steps:

```

procedure first_time;
begin
  for each sense of the "target" word, search WordNet
  definitions for keywords;
  Search the Internet for sense-related examples;
  parse the examples to extract the features of each sentence;
end;

begin
  for each target word
  for each sense of the target word
  if sense-related examples are not available then
    first_time;
  else
    form the similarity matrices WSM and SSM ;
    repeat
      Calculate similarity measure and update WSM and SSM;
      until (stop condition will be satisfied);
    Tag the context of the target word finding the maximum
    similarity based on the final SSM;
    Add the disambiguated context into the set of sense-related
    examples;
  end;
end;

```

We describe below the steps of the algorithm.

4.1 Search WordNet Definitions for Keywords

The majority of synsets in WordNet has a definition, known as gloss, that contains defining phrases and (usually) example phrases of the typical use of the sense. More than 95% of synsets have glosses [17].

If the synset has a gloss, we tag it using Brill's "part-of-speech tagger" [2] and extract all the nouns. A simple interface with WordNet morphology (function `morphstr()`) returns the basic lemmas of the nouns words. These lemmas with all the words in the synset are the keywords that will be combined to form a composite searching query.

Let see an example.

For the sense `administration#1` the WordNet entry is the following:

Synset: {*administration, disposal*}

Defining gloss: (*a method of tending to (especially business) matters*)

Tagging the gloss with Brill's "part-of-speech tagger" gives the following results:

*a/DT/a method/NN/method of/IN/of tending/VBG/tending to/TO/to
(especially/VB/(especially business)/NN/business)matters/NNS/matters*

The nouns (and the keywords returned by the `morpstr()` function) are the following: `method, business, matters`. The possible combinations between synset words and extracted nouns, taken two at a time, give the following composite keywords:

(administration, method), (administration, business), (administration, matter)

(disposal, method), (disposal, business), (disposal, matter)

In the cases where the synsets have not a gloss (5%) we use as keywords only the words in the synset. We also use hyponyms because they have some relevance to the hypernym's sense. It is typical, when somebody gives a definition (of a noun), to use a "superordinate" (broader) term adding distinguished / specialized features [14]. This is evident in WordNet. If we examine the defining glosses of hyponyms for administration#1 we can find:

- => line_management - *(administration of the line functions of an organization; administration of activities contributing directly to the organization's output)*
- => justice, judicature - *(the administration of law; the act of determining rights and assigning rewards or punishments)*
- => conducting - *(the way of administering a business)*
- => organization, organisation - *(the act of organizing a business or business-related activity)*
- => running - *(the act of administering or being in charge of something)*
- => polity - *(shrewd or crafty management of public affairs)*

Working, in a similar way, we extract the nouns from the gloss that contains the "superordinate" term. The composite keywords that we form are all the combinations of the "superordinate" term with each extracted noun and its adjective. For example, from the first hyponym line_management we form the composite keys (administration, function), (administration, organization).

4.2 Searching the Internet

In our method, we use the Altavista full-text search engine to search the web for sense-related examples (texts that contain the keywords from the WordNet definitions specified above).

Altavista stores every word of pages on the Internet in a searchable index and also provides the possibility to create queries using logical operators: *AND*, *OR*, *NOT*, *NEAR*, etc. The *NEAR* operator is very useful for our task because it finds documents containing the specified words within 10 words adjacency. Using the *NEAR* operator and composite keywords, we form queries and ask Altavista to search for pages containing these words in a small window of consecutive words. For example, the composite keyword *(administration, line, function, organization)* will give us the query *administration NEAR line NEAR function NEAR organization*.

The collected sense-related examples are tagged using Brill's "part-of-speech tagger", lemmatized by WordNet morphology functions, and the features are extracted. These features are used in the disambiguation procedure as the feedback set.

5 Experimental Results

We evaluated our method trying to disambiguate the occurrences of 4 polysemous words: *doubt, administration, act, plant*.

For these words we selected all their occurrences in the tagged texts of Semcor, the semantic concordance files tagged to WordNet 1.6 database, where we knew the senses of the words in the texts and we tried to disambiguate them.

The WordNet senses, for each word in our experiment, and the number of times that each sense is tagged in Semcor are listed in table 5.

| word | Senses in WordNet Tagged Texts | Total |
|-----------------------|--|-------|
| <i>doubt</i> | #1 "the state of being unsure" 26 #2 "uncertainty about the truth" 4 | 30 |
| <i>administration</i> | #1 "disposal" 8 #2 "Governing body" 3 #3 "Administering medication" 2 #4 "The tenure of a president" 1 | 14 |
| <i>act</i> | #1 "enactment" 35 #2 "human activity" 26 #3 "a subdivision of a play, opera" 9 #4 "a short theatrical performance" 3 #5 "a manifestation of insincerity" 0 | 73 |
| <i>Plant</i> | #1 "industrial plant" 338 #2 "living organism" 207 #3 "planted secretly by police etc." 2 #4 "an actor situated in the audience" 0 | 547 |

Table 5. The WordNet senses of the 4 polysemous words

For each sentence in Semcor we extracted the features, very easily, because the sentence is syntactically tagged (by Eric Brill's "part-of-speech tagger") and the basic lemma for each word is contained in the sentence's SGML-like format. Table 6 shows the extracted features for each sentence in which the word *administration* appears in Semcor files.

For each sense of the above mentioned, four (4) words we searched the definitions in WordNet and then an Internet search was conducted using Altavista. Eventually, all the sentences containing the words of the composite keywords were collected.

After the "part-of-speech tagging" with Brill's tagger we extracted the features of these sentences. Applying our algorithm, we calculated the similarity measures and disambiguated the occurrences of the four words in Semcor files assigning in each occurrence the sense of its most similar sentence (in the feedback set).

Table 7 shows a summary of the algorithm's performance. The resulted feedback set without using the definitions of direct hyponyms and the feedback set using synset and direct hyponyms' definitions. The use of WordNet hyponymy relation leads to richer collections of sense related-examples and facilitates the disambiguation procedure.

Figure 1 depicts how the number of the sense - related examples increases using the definitions of hyponymy relation and figure 2 illustrates the disambiguation performance.

| |
|--|
| <p><i>administration#1</i> (jury say believe office achieve efficiency reduce cost) (jury praise operation atlanta police_department group location location prison_farm group group) (kill use election reproach) (coconut contain dessert bring_up problem) (award executor administrator payment make person person find comptroller_general united_states necessity compliance requirement law with_respect_to estate) (public_law group federal_government assume responsibility expenditure counseling placement disabled cost provide client rehabilitation case services) (grant certiorari view importance question) (initiative control remain school)</p> <p><i>administration#2</i> (maintain facility inventory business_concern register) (recall liberal person gather utopian san_franisco framework rationalize war rationalize want fear world united_nations) (strategy blockade center attention official member congress officer pentagon)</p> <p><i>administration#3</i> (emotional_state produce drug influence cortical_potential manner synchrony prevail eeg animal tranquilizer asynchrony application psychoactive_drug) (continuous recommend cows)</p> <p><i>administration#4</i> (year person red_scare develop country)</p> |
|--|

Table 6. Extracted features for sentences in Semcor files

| Word | sense | Sentences to be disambiguated | Feedback without hyponymy Relation | % correct per sense | Feedback with hyponymy relation | % correct per sense |
|-----------------------|-------|-------------------------------|------------------------------------|---------------------|---------------------------------|---------------------|
| <i>administration</i> | #1 | 8 | 394 | 87,50 | 654 | 100 |
| | #2 | 3 | 2670 | 100 | 2990 | 100 |
| | #3 | 2 | 269 | 100 | 401 | 100 |
| | #4 | 1 | 397 | 100 | 397 | 100 |
| Total | | 14 | 3730 | 96,88% | 4442 | 100% |
| <i>Act</i> | #1 | 35 | 810 | 94,30 | 882 | 97,1 |
| | #2 | 26 | 203 | 80,8 | 1190 | 92,3 |
| | #3 | 9 | 260 | 88,9 | 260 | 88,9 |
| | #4 | 3 | 992 | 100 | 1054 | 100 |
| Total | | 73 | 2265 | 91% | 3386 | 94,58% |
| <i>Doubt</i> | #1 | 26 | 785 | 92,3 | 1045 | 100 |
| | #2 | 4 | 940 | 100 | 940 | 100 |
| Total | | 30 | 1725 | 96,15 | 1985 | 100 |
| <i>Plant</i> | #1 | 338 | 800 | 86,62 | 1434 | 90,10 |

| | | | | | | |
|-------|----|-----|------|--------|------|--------|
| | #2 | 207 | 782 | 86,95 | 1980 | 92,75 |
| | #3 | 2 | 69 | 100 | 69 | 100 |
| Total | | 547 | 1651 | 91,19% | 3483 | 94,28% |

Table 7. Summary of the performance for the 4 test words

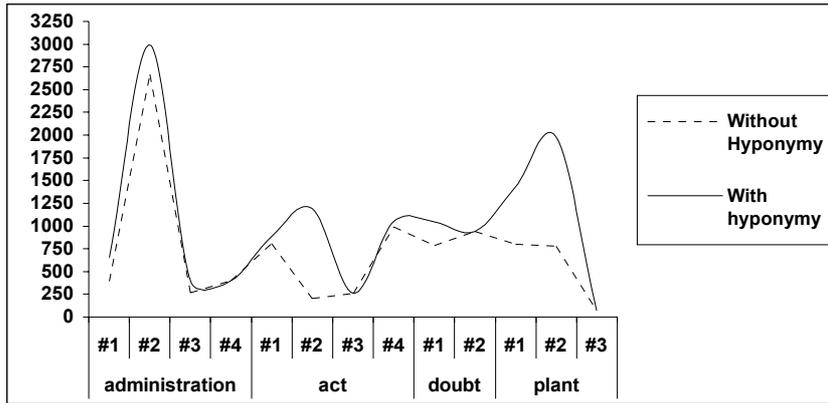


Fig. 1. Number of sense-related examples collected in the two cases: with the use of definitions of the direct hyponyms and without them

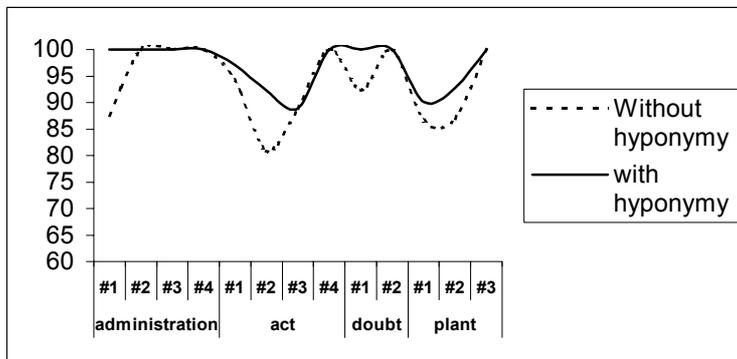


Fig. 2. % correct disambiguated examples using additionally the definitions of WordNet Hyponymy relation to collect sense-related examples

6 Discussion and Future Work

In this paper, a method for word sense disambiguation is described. This method relies on the sense-related information gathered from Internet for the first time the algorithm is running. When the sense-related information for the senses of a word is collected we could disambiguate, in an easier way, the appearances of the word in a text. At the end of the disambiguation procedure we enrich our collection by adding these

disambiguated examples for each sense in the corresponding sense-related information. The use of WordNet is a prerequisite. It provides a definition for each sense giving keywords for searching the Internet to collect the essential sense-related information. Moreover the WordNet hyponymy relation enables the acquisition of richer collections by using the definitions of direct hyponyms.

WordNet also provides and other semantic relations between synsets, not used here, like meronymy-holonymy and “coordination” for nouns. The usefulness of these semantic relations will be evaluated in a future work.

Our method seems promising for text retrieval. Text Retrieval deals with the problem of finding the relevant documents to a specific query, in a text collection. The parallelism between the relevant documents and the sense-related examples offers us the possibility to apply similar techniques not only to disambiguate word senses but also to match (semantically) related texts in documents and queries.

We also want to evaluate the use of WordNet semantic relations and the proposed similarity based measures in other research areas (e.g. image retrieval technology).

References

1. Agirre E., Rigau G.: Word Sense Disambiguation Using Conceptual Density. *Proceedings 16th International Conference on Computational Linguistics (COLING)*, Copenhagen (1996)
2. Brill E.: A Simple Rule Based Part of Speech Tagger. *Proceedings 3rd Conference on Applied Natural Language Processing (ACL)* (1992)
3. Brown P., Della P.S., Della P.D., Mercer R.: Word Sense Disambiguation Using Statistical Methods. *Proceedings 29th Meeting of the Association for Computational Linguistics (ACL)* (1991)
4. Chklovski T., Mihalcea R.: Building a Sense Tagged Corpus with Open Mind Word Expert, *Proceedings ACL Workshop on "Word Sense Disambiguation: Recent Successes and Future Directions"*, Philadelphia, PA, (2002)
5. Dagan I., Pereira F., Lee L.: Similarity-Based Estimation of Word Co- occurrence Probabilities. *Proceedings 32nd Annual Meeting of the Association for Computational Linguistics (ACL)*, Las Cruces (1994) 272-278
6. Fellbaum C.: *WordNet, an Electronic Lexical Database*. The MIT Press (1998)
7. Gale W., Church K.W., Yarowski D.: A Method for Disambiguating Word Senses in a Large Corpus. *Computers and Humanities*, 26 (1992)
8. Hearst M.A.: Noun Homographs Disambiguation Using Local Context in Large Text Corpora. *Proceedings 7th Annual Conference of the UW Centre for the New OED and Text* (1991)
9. Karov Y., Edelman S.: Similarity-based Word Sense Disambiguation. *Association for Computational Linguistics* (1997)
10. Leacock C., Chodorow M.: Combining Local Context and WordNet5 Similarity for Word Sense Disambiguation. In: [6]
11. Leacock C., Towell G., Voorhess E.M.: Corpus Based Statistical Sense Resolution. *Proceedings ARPA Human Language Technology Workshop*, San Francisco (1993) 260-265
12. Luk A.: Statistical Sense Disambiguation with Relatively Small Corpora Using Dictionary definitions. *Proceedings 33rd Meetings of the Association for Computational Linguistics (ACL)*, Cambridge, MA (1995) 181-188

13. Miller G. and Teibel D.: A Proposal for Lexical Disambiguation. *Proceedings DARPA Workshop Speech and Natural Language*, Pacific Grove, CA (1991) 395-399
14. Miller G.: Nouns in WordNet: a Lexical Inheritance System. *Five Papers on WordNet* Princeton Univ. (1993)
15. Miller G., Beckwith R., Fellbaum C., Gross D., Miller K.: Introduction to WordNet: an On-line Lexical Database. *Five Papers on WordNet* Princeton Univ. (1993)
16. Mihalcea R.: Bootstrapping Large Sense Tagged Corpora, *Proceedings 3rd International Conference on Languages Resources and Evaluations LREC*, Las Palmas, Spain, (2002)
17. Mihalcea R., Moldovan D.: Automatic Acquisition of Sense tagged Corpora. *American Association for Artificial Intelligence* (1999)
18. Resnik P.: Using Information Content to Evaluate Semantic Similarity in a Taxonomy. *Proceedings IJCAI Conference* (1995)
19. Resnik P.: WordNet and Distributional Analysis: a Class-based Approach to Lexical Discovery. *Statistically-Based Natural-Language-Processing Techniques: Papers from the AAAI* (1992)
20. Sussna M.: Word Sense Disambiguation for Free-text Indexing Using a Massive Semantic Network. *Proceedings 2nd CIKM Conference*. Arlington, VI (1993)
21. Voorhees E.: Using WordNet to Disambiguate Word Senses for Text Retrieval. *Proceedings ACM SIGIR Conference* (1993)
22. Yarowsky D.: Word-sense Disambiguation Using Statistical Models of Roget's Categories Trained on Large Corpora. *Proceedings 14th International Conference on Computational Linguistics (COLING)*, Nantes, France (1992) 454-460